



Technical Data Sheet

1007M

Liquid Adhesives

Product Description


A general purpose, solvent-synthetic resin based primer. It provides a firm base coat which maximizes the bonding efficiency of adhesive or coating subsequently applied. As an undercoating it exhibits good heat resistance and bond flexibility. Dries in one hour at room temperature. An especially compounded replacement for Bostik 1007P Primer for longer container stability.

Product Benefits

Designed especially to increase adhesive anchorage to metal, plastic, glass, wood, concrete and many other rigid and semirigid surfaces. Successfully used in the Aircraft, automotive, construction, electronics, plastic, rubber and textile industries as a primer for iron, steel, including chrome plated and stainless, aluminum including plain, chromated and anodized; and plastics of the acrylic, phenolic, polyester, PVC and urea types.

Product Applications

- Primer for metal or concrete tanks, vats and ducts prior to the adhesive attachment of semirigid PVC liners.
- Primer coat for bonding synthetic rubber deicing equipment to aircraft wings and propellers.
- Primer for fiberglass reinforced plastics and metals prior to applying neoprene coatings.

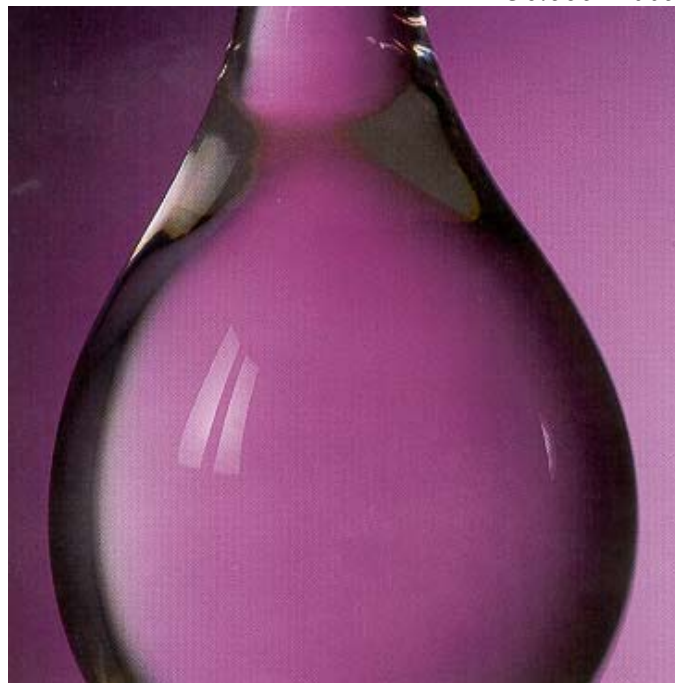

Typical Physical Properties (not for specification use)

| | |
|-----------------------|-------------------------------------|
| Appearance: | Yellow/brown thin syrup |
| Viscosity: | 75-400 cps |
| Weight: | 7.9 lbs./gal. (1.0 kg/liter) |
| Flash Point (SCC): | -7°C (20°F) |
| Base: | Neoprene |
| Solvent: | Bostik 3302 Solvent, toluene |
| Solids (approximate): | 27% |
| Shelf Life: | 9 months stored at 22±5°C (70±10°F) |

Further Information

Please refer to MSDS for complete details.

IMPORTANT NOTICE

All statements, technical information and recommendations set forth herein are based on tests which Bostik believes to be reliable. However, Bostik does not guarantee their accuracy or completeness. The buyer should conduct its own tests of this product before use to determine proper preparation technique and suitability for proposed application. Any sales of this product shall be on terms and conditions set forth on Bostik's order acknowledgement. Bostik warrants that the product conforms with Bostik written specifications, and is free from defects. BOSTIK DISCLAIMS ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE BUYER'S SOLE REMEDY FOR NONCOMPLIANCE WITH THIS WARRANTY SHALL BE FOR THE REPLACEMENT OF THE PRODUCT OR REFUND OF THE BUYER'S PURCHASE PRICE. IN NO CASE WILL BOSTIK BE LIABLE FOR DIRECT, CONSEQUENTIAL ECONOMIC OR OTHER DAMAGES.