



Universal Grounding Cord

SCJCL

Description

This all purpose ground cord is supplied with a banana plug, crocodile clip, stack snap and terminal lug for grounding in any situation. Cord is 3 meters long and supplied in blue. Custom configurations and colours available on request.

Cord Construction And Material

The body housing shall contain Ø4mm, 7mm, 10mm female snap, with or without resistor joined in series to the conductor with ribbed banana plug, moulded eyelet, or another snap on the other end. The ground end of the cord will possess PU strain relief assembly with PP encapsulated body housing.

Conductor: Diameter is 2.5mm, with 7 tinsel wires.

Insulation: Straight cord is insulated with PU material.

Electrical Properties

The cord conductor shall have an end to end resistance not greater than 50 ohms.

Resistivity: Current limiting resistance = 1 meg ohm ± 20%.


Markings

With customer identification logo, resistance value, and date code.



Includes:

The universal grounding cord is supplied with a straight grounding lead, a stack snap and a terminal lug grounding socket.

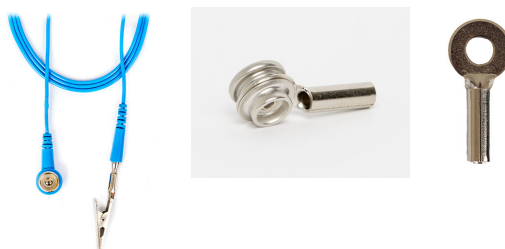



Universal Grounding Cord

SCJCL

Bending Life Test

Exceeds 20,000 cycles of bending life test without any physical damage on the strain relief.

Breakaway Force

1 to 5 lbs. Of pull away force is required to disconnect the snap in a normal disconnect direction.

Connection Integrity

The tensile strength of the end connections shall be not less than 66% of the tensile strength of the wire, and in no case shall it be less than 5 lbs.

Plastic Parts

Made of static dissipative plastic material.

Hardware

All metal parts shall show no evidence of corrosion and rust after 24 hours submersion to salt solution. Preferably made from stainless steel or brass alloy plated with nickel.

Dimensions

Cord's length are available upon request.

Colour

Available in black, blue, dark blue, green, and yellow colour. (Standard is blue).



Important Notice: The information contained within this spec sheet is for guidance only. We make no warranties expressed or implied and assume no liability regarding any use of this information. Universal Grounding Cord, February 24th 2020.